


# For FA/Machine Vision Fixed Focal


## HF12.5SA-1

FIXED 5 Mega MANUAL C-mnt METAL F1.4

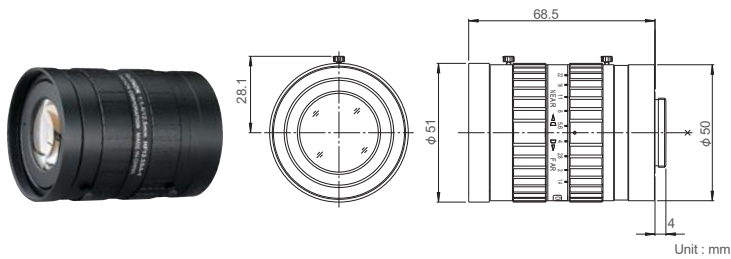


## HF16SA-1

FIXED 5 Mega MANUAL C-mnt METAL F1.4

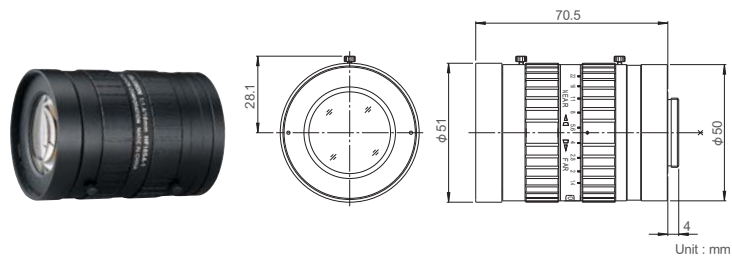


## HF25SA-1

FIXED 5 Mega MANUAL C-mnt METAL F1.4

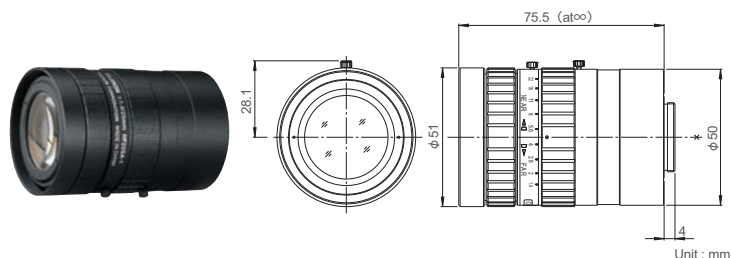


## HF35SA-1

FIXED 5 Mega MANUAL C-mnt METAL F1.4

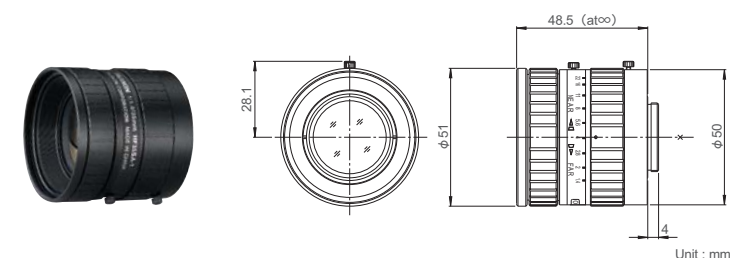


## HF50SA-1

FIXED 5 Mega MANUAL C-mnt METAL

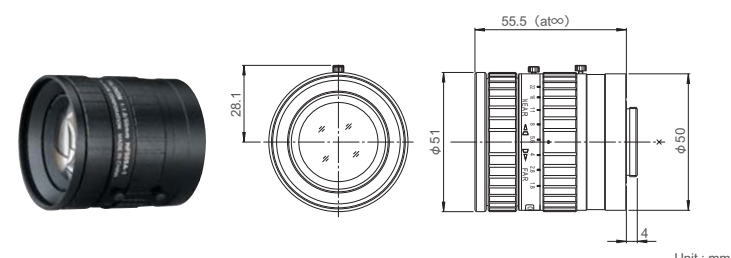

## HF75SA-1

FIXED 5 Mega MANUAL C-mnt METAL

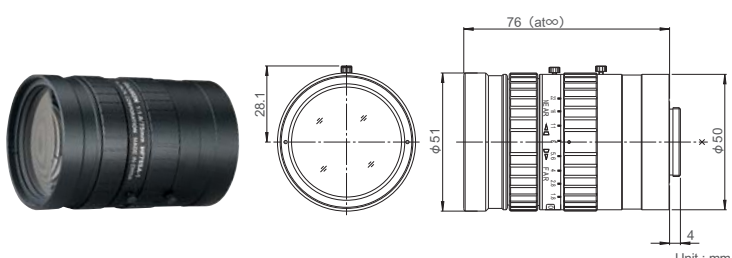


### Feature Indications

- FIXED** Fixed Focal  
High performance single focal lens for the best image quality
- 5 Mega** For Megapixel Camera  
For 5 Megapixel Camera
- MANUAL** Manual Iris  
Manually-operated iris
- C-mnt** C Mount  
Screw-in mounting commonly used in FA lenses
- F1.4** Wide Aperture Rate  
Lens with the wide aperture rate, optimizing the sensitivity of cameras
- METAL** Metal Mount  
Metal mounting with high accuracy and durability

- 🔒 ... With locking knob for iris and focus
- 📏 ... Using an extension tube longer than 5mm the M.O.D. will increase to 0.3m
- 📏 ... Using an extension tube longer than 5mm the M.O.D. will increase to 0.5m

### Megapixel Supporting Lens

We have realized a high resolution, compact, and lightweight lens supporting to megapixel by thoroughly reducing aberrations based on design technology cultivated from broadcast TV lenses. The chart shown at the right compares megapixel supporting lens and the MTF of an ordinary CCTV lens. As the number of TV lines increases, the disparity in MTF becomes bigger.

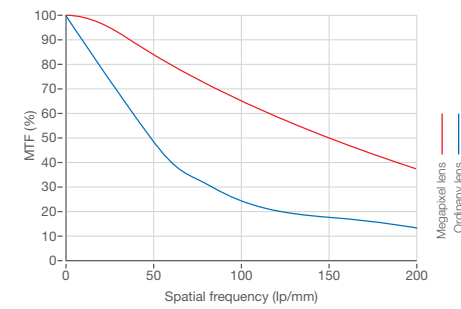


	HF12.5SA-1	HF16SA-1	HF25SA-1	HF35SA-1	HF50SA-1	HF75SA-1
Focal Length (mm)	12.5	16	25	35	50	75
Iris Range	F1.4-F22	F1.4-F22	F1.4-F22	F1.4-F22	F1.8-F22	F1.8-F22
Operation	Focus: Manual Iris: Manual	Focus: Manual Iris: Manual	Focus: Manual Iris: Manual	Focus: Manual Iris: Manual	Focus: Manual Iris: Manual	Focus: Manual Iris: Manual
Angle Of View (H×V)	2/3" 38°47' × 29°35' 1/2" 28°43' × 21°44' 1/3" 21°44' × 16°23'	30°45' × 23°18' 22°37' × 17°04' 17°04' × 12°50'	19°58' × 15°02' 14°35' × 10°58' 10°58' × 8°14'	14°20' × 10°46' 10°27' × 7°51' 7°51' × 5°53'	10°03' × 7°33' 7°19' × 5°30' 5°30' × 4°07'	6°43' × 5°02' 4°53' × 3°40' 3°40' × 2°45'
Focusing Range (From Front Of The Lens) (m)	∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.2	∞ ~ 0.4	∞ ~ 0.9
Object Dimensions at M.O.D. (H×V) (mm)	2/3" 83 × 62 1/2" 60 × 45 1/3" 45 × 34	69 × 51 50 × 37 37 × 28	44 × 33 32 × 24 24 × 18	50 × 38 37 × 27 27 × 21	70 × 52 51 × 38 38 × 28	101 × 76 74 × 55 55 × 41
Back Focal Distance (in air) (mm)	16.07	17.99	22.32	14.99	17.81	24.43
Exit Pupil Position (From Image Plane) (mm)	-101	-172	-140	-37	-49	-52
Filter Thread (mm)	M49 × 0.75	M49 × 0.75	M49 × 0.75	M49 × 0.75	M49 × 0.75	M49 × 0.75
Mount	C	C	C	C	C	C
Mass (g)	295	285	315	185	240	305
Remarks	With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount

# OPTICAL DATA (FA/Machine Vision LENS)

Sensor size	Product name	Focal Length	Aperture/Full open	Front principal point H1 (from Mount)	Back principal point H2 (from Mount)	Distance between the principal points ΔH
1/2"	DF6HA-1B	6.15	1.2	-16.45	11.38	27.82
	HF9HA-1B	9.23	1.4	-12.91	8.30	21.21
	HF12.5HA-1B	12.88	1.4	-2.85	4.64	7.49
	HF16HA-1B	16.49	1.4	3.05	1.03	-2.02
	HF25HA-1B	25.81	1.4	1.82	-8.28	-10.10
	HF35HA-1B	34.99	1.6	-9.00	-17.47	-8.46
2/3"	HF50HA-1B	49.57	2.3	-42.64	-32.04	10.59
	HF75HA-1B	75.01	2.8	-100.77	-57.48	43.29
	HF12.5SA-1	12.83	1.4	-33.68	4.70	38.37
	HF16SA-1	16.33	1.4	-24.15	1.20	25.35
	HF25SA-1	24.00	1.4	-23.47	-6.47	17.00
	HF35SA-1	35.74	1.4	-1.27	-18.21	-16.94
	HF50SA-1	51.72	1.8	-1.87	-34.19	-32.32
	HF75SA-1	74.97	1.8	-34.56	-57.45	-22.89
	HF35SR4A-SA1L	35.00	2.0	-19.33	-17.47	1.85
	HF50SR4A-SA1L	50.00	2.8	18.09	-32.47	-50.56
	1"	CF12.5HA-1	12.83	1.4	-33.68	4.70
CF16HA-1		16.33	1.4	-24.15	1.20	25.35
CF25HA-1		24.00	1.4	-23.47	-6.47	17.00
CF35HA-1		35.74	1.4	-1.27	-18.21	-16.94
CF50HA-1		51.72	1.8	-1.87	-34.19	-32.32
CF75HA-1		74.97	1.8	-34.56	-57.45	-22.89
1/3" (3CCD)	TF2.8DA-8	2.86	2.2	-33.74	14.67	48.41
	TF4DA-8	4.15	2.2	-28.46	13.37	41.83
	TF8DA-8B	8.23	2.2	-10.81	9.30	20.10
	TF15DA-8	15.26	2.2	-0.33	2.27	2.60
	TF25DA-8B	24.94	2.2	14.49	-7.42	-21.91
Fish-Eye	FE185C046HA-1	1.43	1.4	-38.26	16.10	54.36
	FE185C057HA-1	1.78	1.4	-37.55	15.75	53.30
	FE185C086HA-1	2.68	1.8	-35.00	14.85	49.85

Entrance pupil position P1 (from Mount)	Exit pupil position P2 (from Image plane)	Back focal distance (in air)	Distortion	Relative illumination (Aperture: at full open. Image height: at diagonal)
-21.8	-46	11.44	-1.93%	39
-19.1	-28	13.48	-2.09%	32
-10.3	-31	15.09	-2.01%	35
-4.5	-30	15.15	-0.96%	35
-3.0	-32	14.58	-0.27%	46
2.1	-27	15.00	0.03%	56
5.8	-25	15.25	0.04%	61
35.4	-27	15.75	0.27%	63
-44.9	-101	16.07	-0.30%	68
-38.9	-172	17.99	-0.08%	78
-43.3	-139	22.32	-0.18%	72
-2.1	-37	14.99	-0.07%	62
0.5	-49	17.81	-0.03%	75
-2.2	-52	24.43	-0.03%	72
-37.8	-74	19.65	-0.02%	74
-26.7	-484	19.16	0.07%	80
-44.9	-101	16.07	0.17%	40
-38.9	-172	17.99	0.31%	34
-43.3	-139	22.32	0.02%	39
-2.1	-37	14.99	-0.15%	43
0.5	-49	17.81	-0.06%	62
-2.2	-52	24.43	-0.06%	67
-36.7	101	14.51	-6.25%	51
-32.8	88	14.61	-3.78%	53
-18.6	-178	14.83	-1.32%	30
-12.9	-89	16.32	-0.33%	34
-5.1	-120	15.12	-0.12%	30
-39.7	-227	9.70	-0.47% ※	75
-39.3	-66	9.70	-0.80% ※	74
-37.5	-41	9.75	-0.53% ※	84

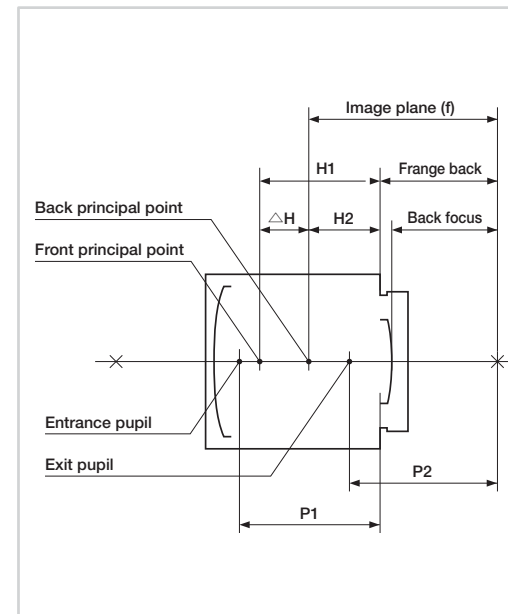

※ $y=f\theta$